



## FEATURES

- Single door control
- Smart Access with 1.5A PSU
- Door forced
- Anti-passback
- 1000 stored events
- 1000 access users supported
- Weatherised readers
- Fully supported through GSR access
- EN Grade 3, Class II

### Access Module

- Single door controller
- Read in/out or read in/request to exit (RTE) option
- 8A rated door strike relay on board
- EOL diagnostic input for integrating door contact into the system
- Programmable output for door forced or invalid card
- 1000 events stored locally in the module

### Smart Access Module

- 1.5A PSU + access module in large metal case
- Full diagnostics for voltage/current and battery state
- Optional battery provides standby power in the event of mains fail
- Integrated proximity reader for token/card operation
- All the functionality of the Access Module plus the PSU
- Up to 1000 access users supported




### Proximity Reader

- Requires Guardall format cards
- Grey or white versions
- Weatherised for outdoor use (IP54)
- Grey or white spacers for metal door frames



**Integration Starts Here!**

**TOTAL FLEXIBILITY**

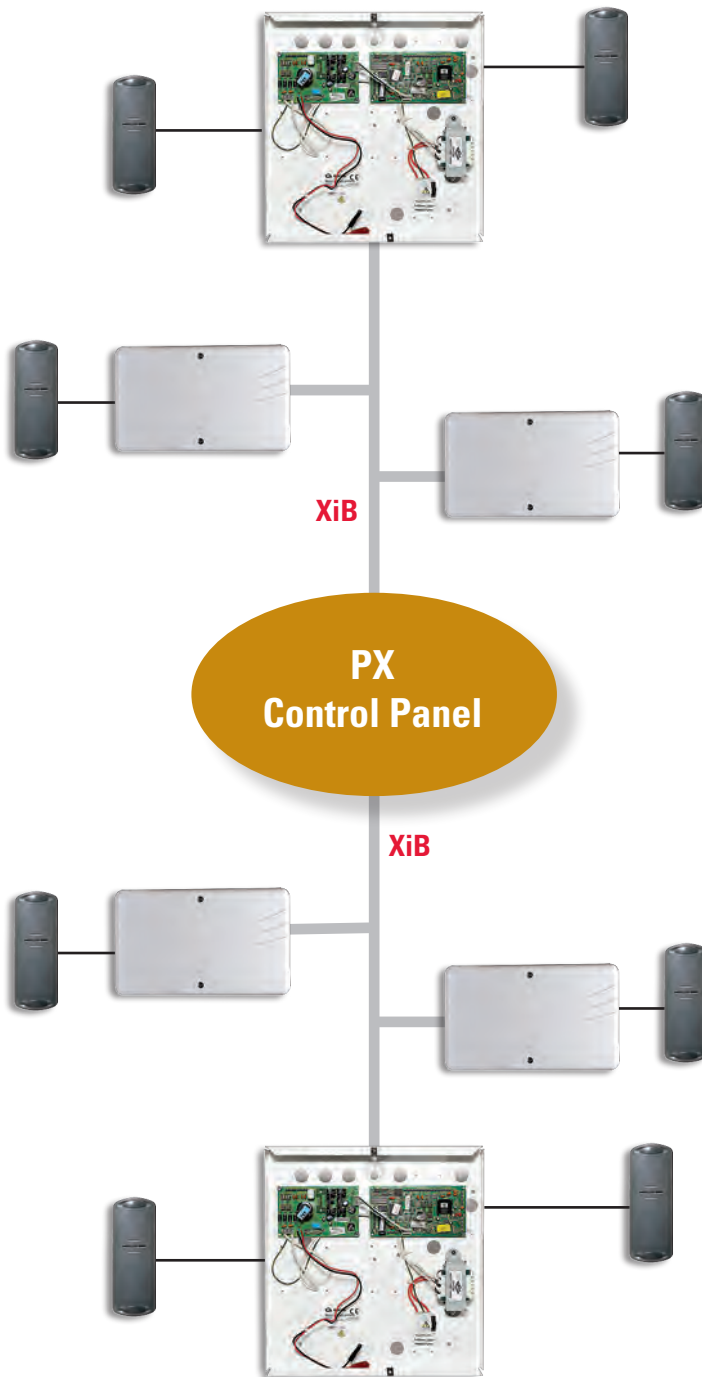

**SPECIFICATIONS**

<b>Access Module</b>	75mA
<b>Smart Access Module</b>	52mA
<b>Proximity Reader</b>	30mA

**ACCESS MODULE CAPACITY**

<b>PX48i</b>	32
<b>PX80i</b>	32
<b>PX500</b>	32
<b>PX250HS</b>	32

**ORDER INFORMATION**

<b>W73822</b>	Access Module
<b>W73847</b>	Smart Access Module
<b>W73821</b>	Proximity Reader Grey
<b>W73821.W</b>	Proximity Reader White
<b>W74429</b>	Proximity Reader Spacer Grey
<b>W74430</b>	Proximity Reader Spacer White
<b>W73820</b>	Proximity Tokens (2 off)
<b>W73837</b>	Proximity Cards (10 off)

Guardall is a worldwide supplier.  
For contact information, please go to [www.guardall.com](http://www.guardall.com)